




# JET OILER EALDU900-20

Central control of the multi-point lubrication. Low oil consumption. Simplified oil quantity adjustment, by adjustment of only the differential pressure. Oil can be topped up without having to shut off the compressed air supply. The formation of the oil-mist can be checked through the oil fill port.

## Related products



**ATLUB**  
Air Tool Oil, 1 litre

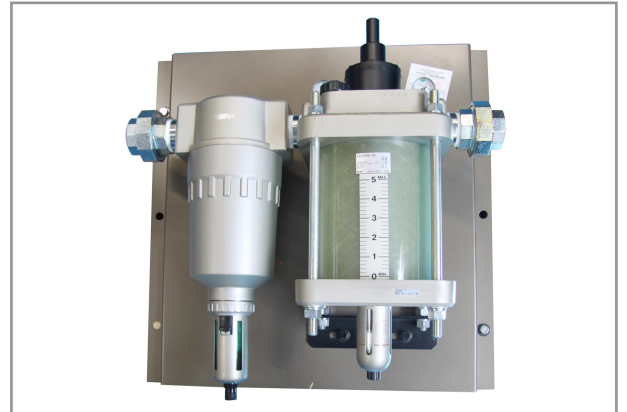

## Specifications

<b>Brand</b>	<b>SMC</b>
<b>Filter (micron)</b>	<b>5</b>
<b>Airconnection</b>	<b>2"</b>
<b>(NI/min)</b>	<b>15000</b>
<b>Workingpressure (MPa)</b>	<b>0,15 - 1,0</b>
<b>Bowl capacity (cm3)</b>	<b>5000</b>
<b>EAN</b>	<b>8717981379644</b>