RED ROOSTER
LEADING IN POWER TOOL SOLUTIONS

# AIR CHAIN HOIST 12000 KG
# TMH-12000P4E

**The NEW RED ROOSTER TMH series air chain hoists has the highest lifting speed with the lowest headroom on the hoist market. With M4 classification of mechanism this hoist is extremely durable. This hoist will guarantee the continuity of your process. The TMH hoists are designed with a full load supporting eye for installation and securing the hoist (during lifting operation) for extra safety.**

**Standard features:**
- **Precise variable speed control (cord- and pendant control)**
- **Optimum control of the load, very precise positioning**
- **Main air shut off valve**
- **Mechanical end stop system**
- **Load limiter built-in without loss of headroom**
- **Low noise level (80 dBA)**
- **Working air pressure 0,4 - 0,63 MPa (4-6,3 bar)**
- **Piped away exhaust air**

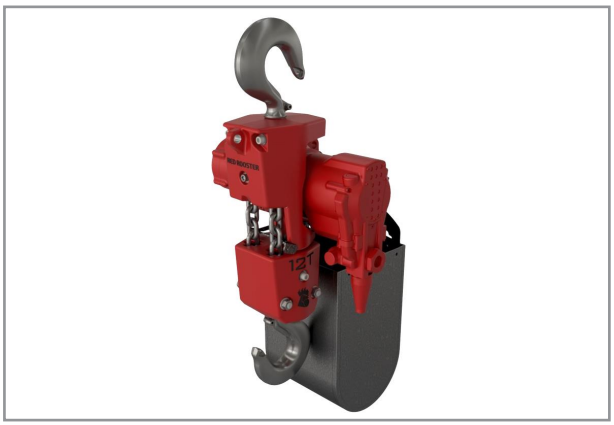

## Related products


**42-02-28-VRD**
**Pendant Valve Assy TCR/TMH**


**13X36RTS**
**Chain RTS EN 818-7**


**AC60-F10DE-D**
**Frl Unit**


**13X36**
**Chain EN 818-7**

## Specifications

| | |
|---|---|
| **Brand** | **RedRooster** |
| **Airconsumption (l/s)** | **58,3** |
| **Number of chain falls** | **4** |
| **Lowering speed full load (m/min)** | **2,5** |
| **Weight incl. 3m lift (kg)** | **190** |
| **Lifting speed full load (m/min)** | **1,35** |
| **Lifting speed 0-load (m/min)** | **2,7** |
| **Airconnection** | **1" PT** |
| **Airpress max. (MPa)** | **0,63** |
| **mm A** | **856** |
| **mm B** | **398,5** |
| **mm C** | **149,5** |
| **mm D** | **249** |
| **mm E** | **52** |
| **mm F** | **309** |
| **mm G** | **266** |
| **mm H** | **67** |
| **mm I** | **84** |
| **mm J** | **58** |
| **mm K** | **84** |
| **Hosediameter (mm)** | **19** |
| **Capacity (kg)** | **12000** |
| **Airconnection exhaust** | **1"** |
| **EAN** | **8717981340552** |

