

HOIST/TROLLEY COMBINATION 12000 KG

TMH-12000/4-AT10S-R1

Heavy duty range of hoists with high efficiency motor gearbox

STANDARD FEATURES:

- TOKU rotary vane motor
- Failsafe automatic internal disc brake
- Trolley travel self braking
- Choice of pendant controls or control stations
- Upper & lower limit switches
- Forged alloy steel safety swivel hooks with safety catch
- Anti-tilt & anti-drop plates
- Wheel profile to suit parallel or tapered flanges

AVAILABLE OPTIONS:

- Marine specification paint systems
- ATEX Category 2 (zone 1/21) specification
- Chain collectors (PVC, galvanised or stainless steel)
- Travel limits
- Beam brake
- Articulated trolley for small beam radius

Standard flange range R1: 110 - 180 mm

Other flange ranges also available: R2: 180 - 240 mm, or R3: 240 - 300 mm

Related products



42-02-35-VRD

4-Button Pendant Valve Assy TCR/TMH



13X36RTS

Chain RTS EN 818-7




AC60-F10DM-8-B

Modular FRL Unit



13X36

Chain EN 818-7

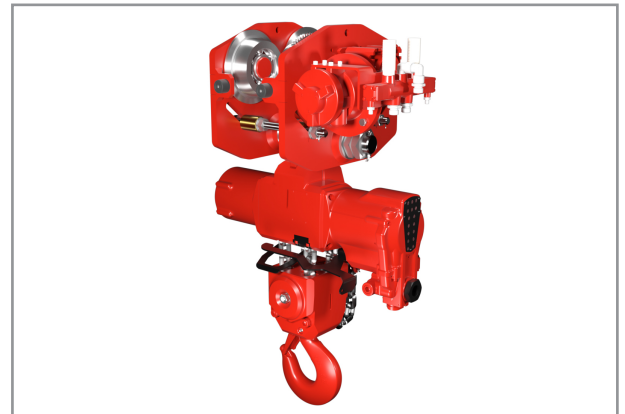

Specifications

| | |
|---|---------------|
| Brand | RedRooster |
| Airconsumption (l/s) | 40 |
| Number of chain falls | 4 |
| Flange width with integrated hoist (mm) | 110 - 180 |
| Weight incl. 3m lift (kg) | 310 |
| Lifting speed full load (m/min) | 1,35 |
| Lifting speed 0-load (m/min) | 2,7 |
| Chain weight (kg/m) | 3,8 |
| Chain (mm) | 13X36 |
| Airconnection | 1" PT |
| Min beam radius (m) | 2,5 |
| Workingpressure (MPa) | 0,4 - 0,63 |
| Airhose (mm) | 19 |
| Air consumption lifting (l/s) | 68 |
| Std temperature range (° C) | -10 - +50 |
| Optional tempertaure range (° C) | -20 - +70 |
| Standard travel speed (m/min) | 8 |
| ATEX travel speed (m/min) | 8 |
| Number of driven wheels | 2 |
| Sound pressure (dB(A)) | 4 |
| EAN | 8717981399598 |