

AIR CHAIN HOIST 45000 KG TMH-45TP3E

The RED ROOSTER TMH-30 series air chain hoists has the highest lifting speed on the hoist market. With M2 classification of mechanism this hoist is extremely reliable. This hoist will guarantee the continuity of your process. The TMH hoists are designed with a supporting eye for easy installation.

Standard features:

- Precise variable speed control (cord control)
- Optimum control of the load, very precise positioning
- Main air shut off valve
- Mechanical end stop system
- Load limiter built-in without loss of headroom
- Low noise level (84 dBA)
- Working air pressure 0,4 - 0,63 MPa (4-6,3 bar)
- Piped away exhaust air

Related products



42-02-28-VRD

Pendant Valve Assy TCR/TMH




SO-112392-AC825-14

Filter/Regulator/Lubricator 1-1/2"



23,5X66

Chain EN 818-7

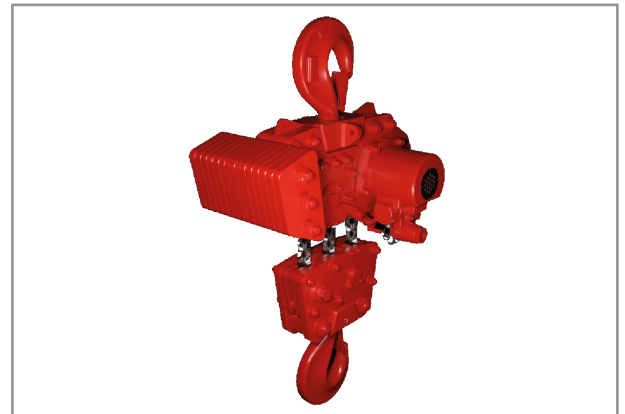

Specifications

| | |
|----------------------------------|---------------|
| Brand | RedRooster |
| Number of chain falls | 3 |
| Lowering speed full load (m/min) | 1,8 |
| Weight incl. 3m lift (kg) | 1.300 |
| Lifting speed full load (m/min) | 0,65 |
| Lifting speed 0-load (m/min) | 1,8 |
| Chain weight (kg/m) | 12,1 |
| Chain (mm) | 23,5 x 66 |
| Chainbag/Chainbucket | + |
| Loadlimiter | * |
| Airconnection | 1,5" BSPT |
| Airpress max. (MPa) | 0,63 |
| Airconsumption fullload (l/s) | 108 |
| mm A | 1440 |
| mm B | 1150 |
| mm C | 557,5 |
| mm D | 592,5 |
| mm E | 118 |
| mm F | 90 |
| mm G | 830 |
| mm H | 380 |
| mm I | 675 |
| mm J | 125 |
| mm K | 118 |
| mm L | 545 |
| mm M | 352 |
| mm N | 356 |
| mm O | 112 |
| mm P | 112 |
| mm Q | 300 |
| EAN | 8717981397150 |

