

HOIST/TROLLEY COMBINATION 500 KG TCR-500-LHR

Heavy duty hoist built into low headroom trolley frame with high efficiency motor gearbox

STANDARD FEATURES:

- TOKU rotary vane motor
- Failsafe automatic internal disc brake
- Trolley travel self braking
- Choice of pendant controls or control stations
- Upper & lower limit switches
- Forged alloy steel safety swivel hooks with safety catch
- Anti-tilt & anti-drop plates
- Wheel profile to suit parallel or tapered flanges

AVAILABLE OPTIONS:

- Marine specification paint systems
- ATEX Category 2 (zone 1/21) specification
- Chain collectors (PVC, galvanised or stainless steel)
- Travel limits
- Beam brake
- Articulated trolley for small beam radius

Related products



42-02-35-VRD

4-Button Pendant Valve Assy TCR/TMH




6,3X19,1RS60

Chain RSA60 DIN 5684-6



6,3X19,1RTS

Chain RTS EN 818-7

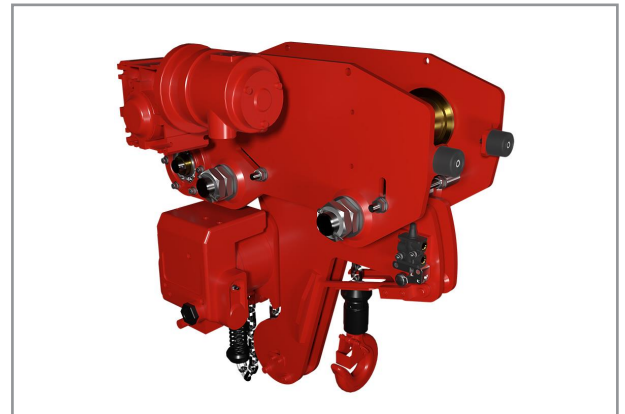

Specifications

Brand	RedRooster
Number of chain falls	1
Lowering speed full load (m/min)	17,9
Flange width with integrated hoist (mm) - 300	
Weight incl. 3m lift (kg)	85
Lifting speed full load (m/min)	10,5
Lifting speed 0-load (m/min)	16
Chain weight (kg/m)	0,8
Chain (mm)	6,3x19,1
Airconnection	PT 1/2"
Workingpressure (MPa)	0,4 - 0,63
Capacity (kg)	500
Air consumption lifting (l/s)	25
Standard travel speed (m/min)	9
Air consumption traveling (l/s)	25
EAN	8717981347537