

AIR CHAIN HOIST 6000 KG TMH-6000P2E

The NEW RED ROOSTER TMH series air chain hoists has the highest lifting speed with the lowest headroom on the hoist market. With M4 classification of mechanism this hoist is extremely durable. This hoist will guarantee the continuity of your process. The TMH hoists are designed with a full load supporting eye for installation and securing the hoist (during lifting operation) for extra safety.

Standard features:

- Precise variable speed control (cord- and pendant control)
- Optimum control of the load, very precise positioning
- Main air shut off valve
- Mechanical end stop system
- Load limiter built-in without loss of headroom
- Low noise level (80 dBA)
- Working air pressure 0,4 - 0,63 MPa (4-6,3 bar)
- Piped away exhaust air

Related products



42-02-28-VRD

Pendant Valve Assy TCR/TMH




AC60-F10DM-8-B

Modular FRL Unit



13X36

Chain EN 818-7

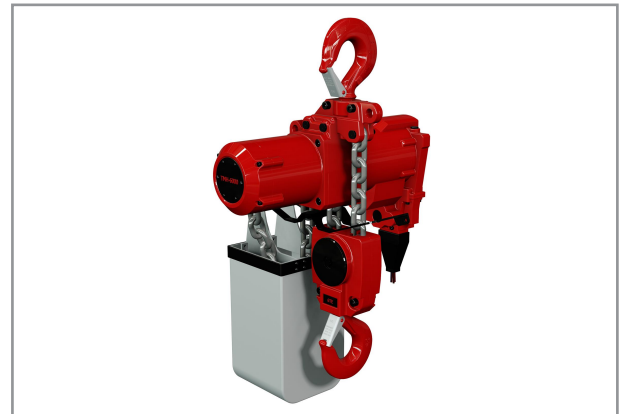

Specifications

Brand	RedRooster
Weight (kg)	103
Number of chain falls	2
Lowering speed full load (m/min)	5,1
Lowering speed 0-load (m/min)	3,6
Lifting speed full load (m/min)	2,8
Lifting speed 0-load (m/min)	5,4
Chain weight (kg/m)	7,6
Chain (mm)	13 x 36
Chainbag/Chainbucket	+
Loadlimiter	+
Airconnection	1" BSPT
Airpress max. (MPa)	0,63
Airconsumption fullload (l/s)	58,3
mm A	737
mm B	245
mm C	130
mm D	265
mm E	315
mm F	65
mm G	42
mm H	42
mm I	49
mm J	170
Hosediameter (mm)	19
Capacity (kg)	6000
Airconnection exhaust	1"
EAN	8717981340514

