

# AIR CHAIN HOIST 6000KG 3MTR HOL

## TMH-6000P2E-3M

The NEW RED ROOSTER TMH series air chain hoists has the highest lifting speed with the lowest headroom on the hoist market. With M4 classification of mechanism this hoist is extremely durable. This hoist will guarantee the continuity of your process. The TMH hoists are designed with a full load supporting eye for installation and securing the hoist (during lifting operation) for extra safety.

#### Standard features:

- Precise variable speed control (cord- and pendant control)
- Optimum control of the load, very precise positioning
- Main air shut off valve
- Mechanical end stop system
- Load limiter built-in without loss of headroom
- Low noise level (80 dBA)
- Working air pressure 0,4 - 0,63 MPa (4-6,3 bar)
- Piped away exhaust air
- Pendant push button control


The price includes three meter of lift and two meter of control length, excluding the chain bucket.

#### Related products



AC60-F10DM-8-B

Frl Unit

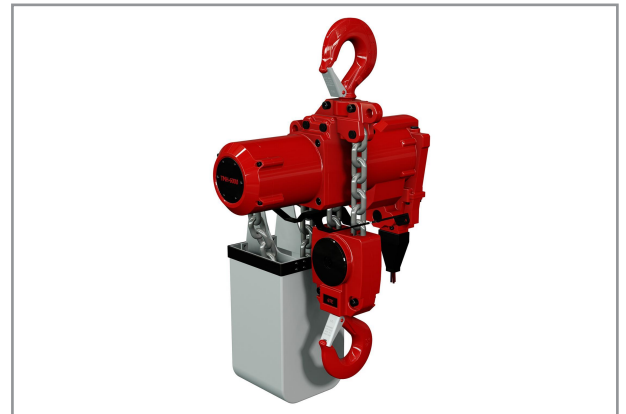

#### Specifications

|                                  |               |
|----------------------------------|---------------|
| Brand                            | RedRooster    |
| Weight (kg)                      | 103           |
| Number of chain falls            | 2             |
| Lowering speed full load (m/min) | 5,1           |
| Lowering speed 0-load (m/min)    | 3,6           |
| Lifting speed full load (m/min)  | 2,8           |
| Lifting speed 0-load (m/min)     | 5,4           |
| Chain weight (kg/m)              | 7,6           |
| Chain (mm)                       | 13 x 36       |
| Chainbag/Chainbucket             | +             |
| Loadlimiter                      | +             |
| Airconnection                    | 1" BSPT       |
| Airpress max. (MPa)              | 0,63          |
| Airconsumption fullload (l/s)    | 58,3          |
| mm A                             | 737           |
| mm B                             | 245           |
| mm C                             | 130           |
| mm D                             | 265           |
| mm E                             | 315           |
| mm F                             | 65            |
| mm G                             | 42            |
| mm H                             | 42            |
| mm I                             | 49            |
| mm J                             | 170           |
| Hosediameter (mm)                | 19            |
| Capacity (kg)                    | 6000          |
| Airconnection exhaust            | 1"            |
| EAN                              | 8717981391844 |

