RED ROOSTER
LEADING IN POWER TOOL SOLUTIONS

AIR CHAIN HOIST 3000 KG
TMH-3000PE

The NEW RED ROOSTER TMH series air chain hoists has the highest lifting speed with the lowest headroom on the hoist market. With M4 classification of mechanism this hoist is extremely reliable. This hoist will guarantee the continuity of your process. The TMH hoists are designed with a full load supporting eye for installation and securing (during lift applications) the hoist for extra safety.

Standard features:
- **Precise variable speed control (cord- and pendant control)**
- **Optimum control of the load, very precise positioning**
- **Main air shut off valve**
- **Mechanical end stop system**
- **Load limiter built-in without loss of headroom**
- **Low noise level (80 dBA)**
- **Working air pressure 0,4 - 0,63 MPa (4-6,3 bar)**
- **Piped away exhaust air**

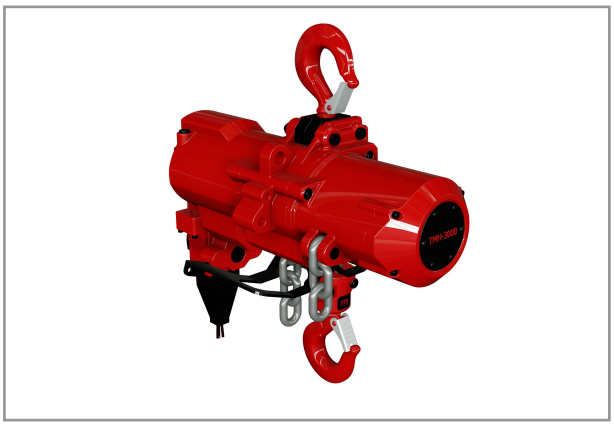

Related products


42-02-28-VRD
Pendant Valve Assy TCR/TMH


13X36RTS
Chain RTS EN 818-7


AC60-F10DE-D
Frl Unit


13X36
Chain EN 818-7

Specifications

Brand	**RedRooster**
Number of chain falls	**1**
Lowering speed full load (m/min)	**10,5**
Lowering speed 0-load (m/min)	**6,4**
Weight incl. 3m lift (kg)	**99**
Lifting speed full load (m/min)	**5,4**
Lifting speed 0-load (m/min)	**10,7**
Chain weight (kg/m)	**3,8**
Chain (mm)	**13 x 36**
Airconnection	**1" BSPT**
Airpress max. (MPa)	**0,63**
Airconsumption fullload (l/s)	**58,3**
mm A	**537**
mm B	**190**
mm C	**125**
mm D	**265**
mm E	**315**
mm F	**50**
mm G	**34**
mm H	**35**
mm I	**45**
Hosediameter (mm)	**19**
Capacity (kg)	**3000**
Airconnection exhaust	**1"**
EAN	**8717981340491**

